



AN ENGINEERING SERVICES FRAMEWORK FOR ADDITIVE MANUFACTURING

Abstract

Additive manufacturing is now mature and is becoming a mainstream production technique for various industries. It is important that engineering services organizations equip themselves to provide a new range of services in this sector. This paper presents an engineering process framework for evaluating and adopting additive manufacturing. It describes tools developed to improve engineering services for additive manufacturing. The paper also demonstrates the developed engineering process through a practical example of re-engineering a mechanical component, from conventional manufacturing to additive manufacturing along with the cost-benefit analysis.

Introduction

Additive manufacturing, also known as 3D printing, is a technology that produces three-dimensional parts from its digital representation, through consecutive addition of material. It offers the possibility to produce parts without the design constraints of traditional manufacturing. Components that would not have been possible to manufacture using conventional methods and processes, can now be made using a wide range of materials with additive manufacturing. No longer solely a prototyping technology, additive manufacturing is being used to produce the most demanding applications such as medical and aerospace components.

Against this backdrop, the engineering services industry needs to gear up to cater to the entire additive manufacturing value chain. This includes 3D printer manufacturers, material vendors, software vendors, service providers, and product manufacturers. The offering, typically, leverages the design freedom, weight reduction, and quicker time-to-market, avoiding the lead time for tooling and reducing material usage. Such offerings would require identifying the right opportunities, developing the optimal designs, and performing the value accounting of design. In addition, a supportive environment needs to be built, consisting of subject-matter experts across

domain and manufacturing segments and infrastructure to explore the capabilities of additive manufacturing. Tools for selection of parts, design optimization, and value accounting will enhance the speed and efficiency of the process. A framework that brings together these elements is provided in Figure 1.

Additive manufacturing offerings

Ab-initio design, design for re-engineering and repair, cost optimization, manufacturing solutions, supplier collaboration

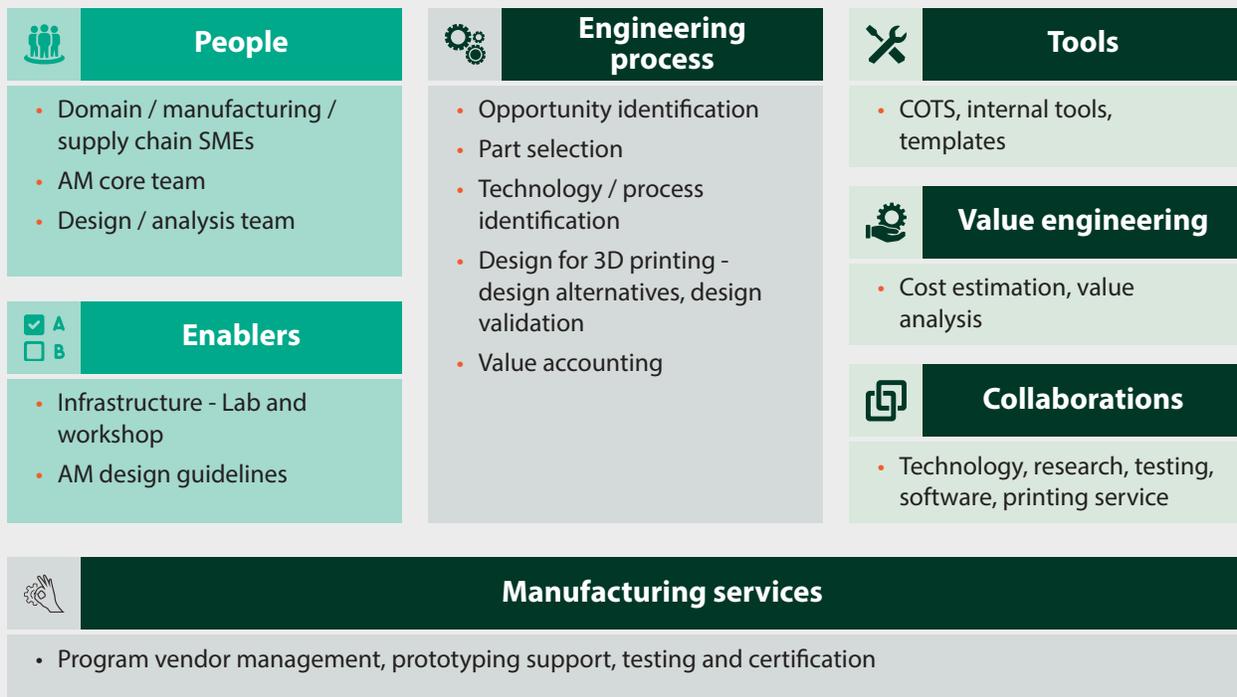


Figure 1: Additive manufacturing framework

The engineering process for additive manufacturing

A business, while analyzing the suitability of additive manufacturing, typically, encounters the questions as below:

- Which parts are best suited for additive manufacturing?
- What is the applicability in the context of the existing design as well as ab initio design?
- How can the design freedom, offered

by additive manufacturing, be best leveraged?

- Which of the multiple technologies are best suited?
- Will the part be cost-effective? Is there a business case in using additive manufacturing?

First, the decision on whether the business can take advantage of additive

manufacturing needs to be made. Once the decision is made to use additive manufacturing, the engineering process involves identifying the right components, the right technologies, and the optimized design offering the best value. A structured framework enables making these choices with fewer iterations. A typical engineering process is depicted in Figure 2.

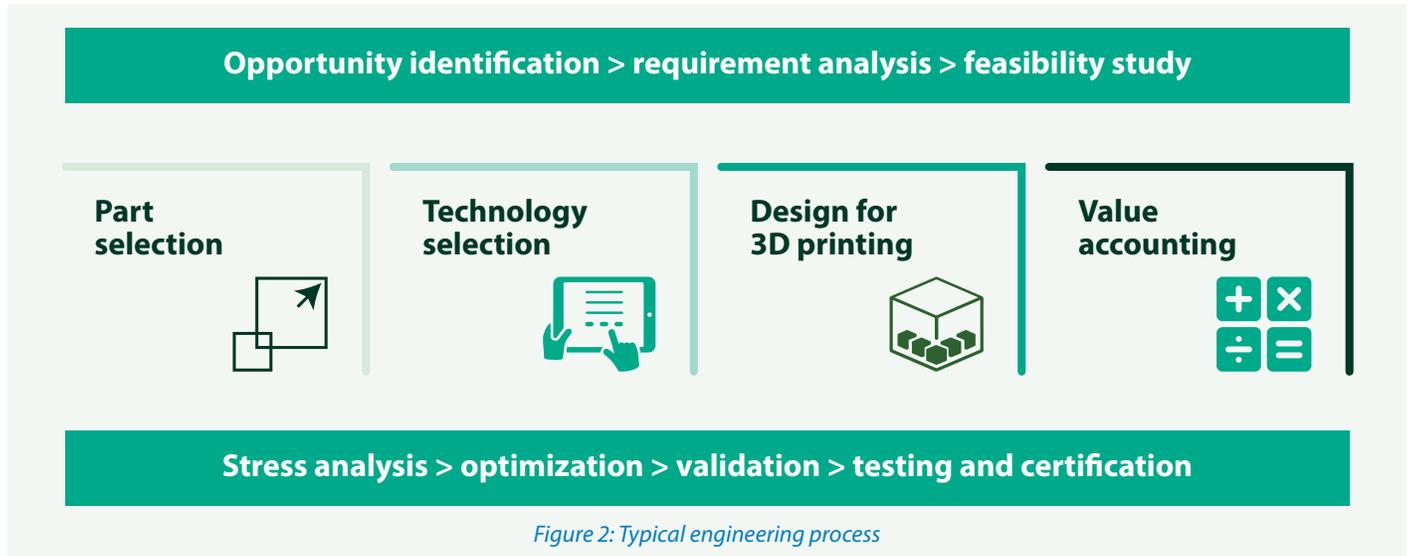


Figure 2: Typical engineering process

Part selection

The characteristic advantages of additive manufacturing that is best leveraged, varies with the industry. Here are some examples:

- The capability to have lattices, replacing internal volumes, provides a great potential for weight optimization in aerospace
- Customization of individual parts achieved through CAD allows medical requirements to be met for individual patients
- The need to print at site to minimize logistical requirements of spare parts reaching remote locations, can help industries such as mining

The selection process is effective when some of the key benefits (Figure 3: Key

benefits) of additive manufacturing result in a major improvement. Parameters

need to be defined such that it guides the engineer in accurate parts selection.

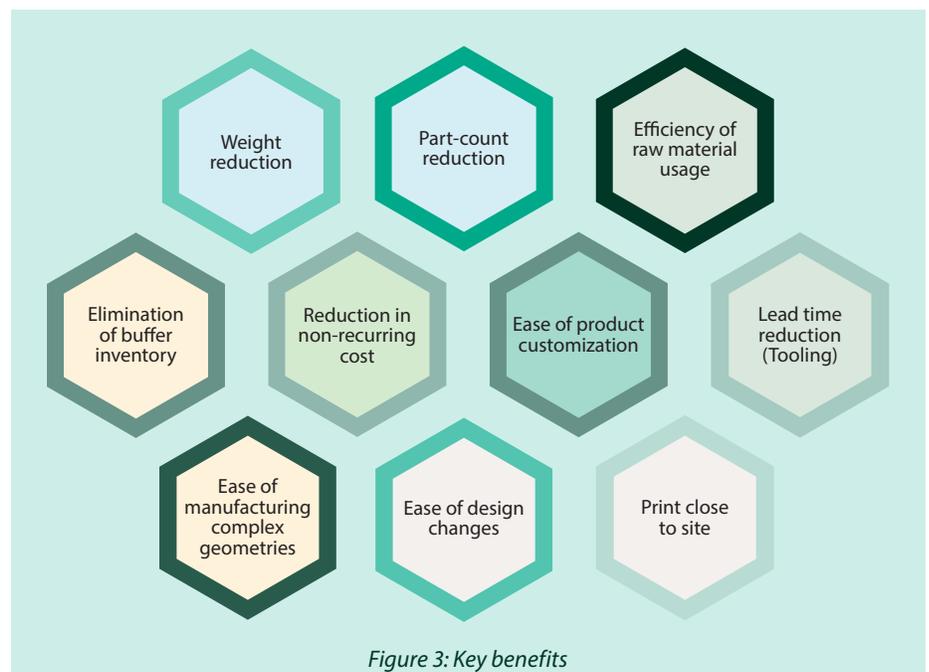


Figure 3: Key benefits

The analysis of an existing product typically begins with a study of the visualization models comprising the entire product parts. The required data is captured to enable the application of selection parameters to filter parts that are best suited for additive manufacturing. Then, a review of the functional requirements is performed to ensure

that the design meets the requirements. A preliminary impact on the cost is also studied. The results are studied further in an expert group that identifies a short-listed set of parts.

The requirements vary based on the life cycle stage of the product for which additive manufacturing is proposed. For

a new product, additive manufacturing could be considered as a prototype, limited production, or series production process. For prototype and limited production, the freedom that additive manufacturing offers to build parts of very high complexity without the lead time for tooling is a huge advantage.


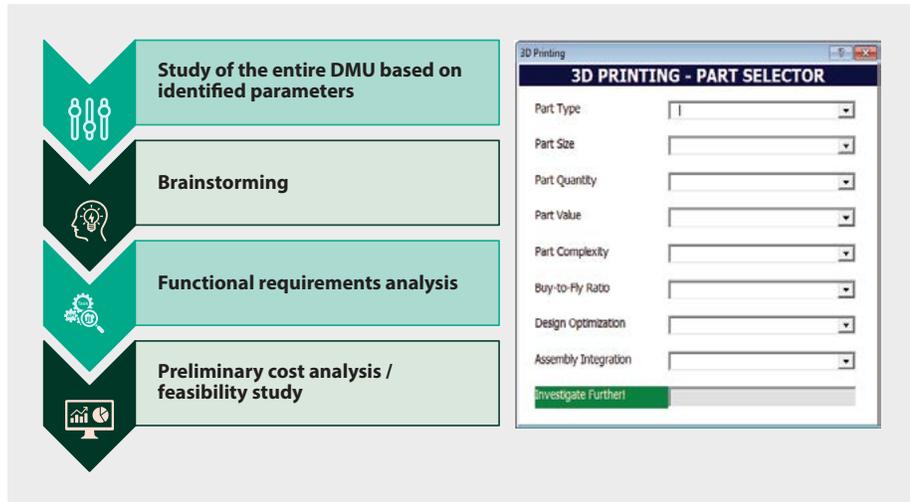


Figure 4: Part selection

Infosys has developed a tool (Figure 4) to analyze parts based on a set of parameters and establish the feasibility of the part for additive manufacturing. This is performed by analyzing the part attributes (type, size, quantity, value), complexity of the part, manufacturing limitations, opportunity for weight-reduction, and design optimization to reduce raw material requirement. Specific requirements of the industry are also analyzed such as the buy-to-fly ratio in aerospace. The tool provides a comparative score that can guide the engineer in preliminary parts short-listing.

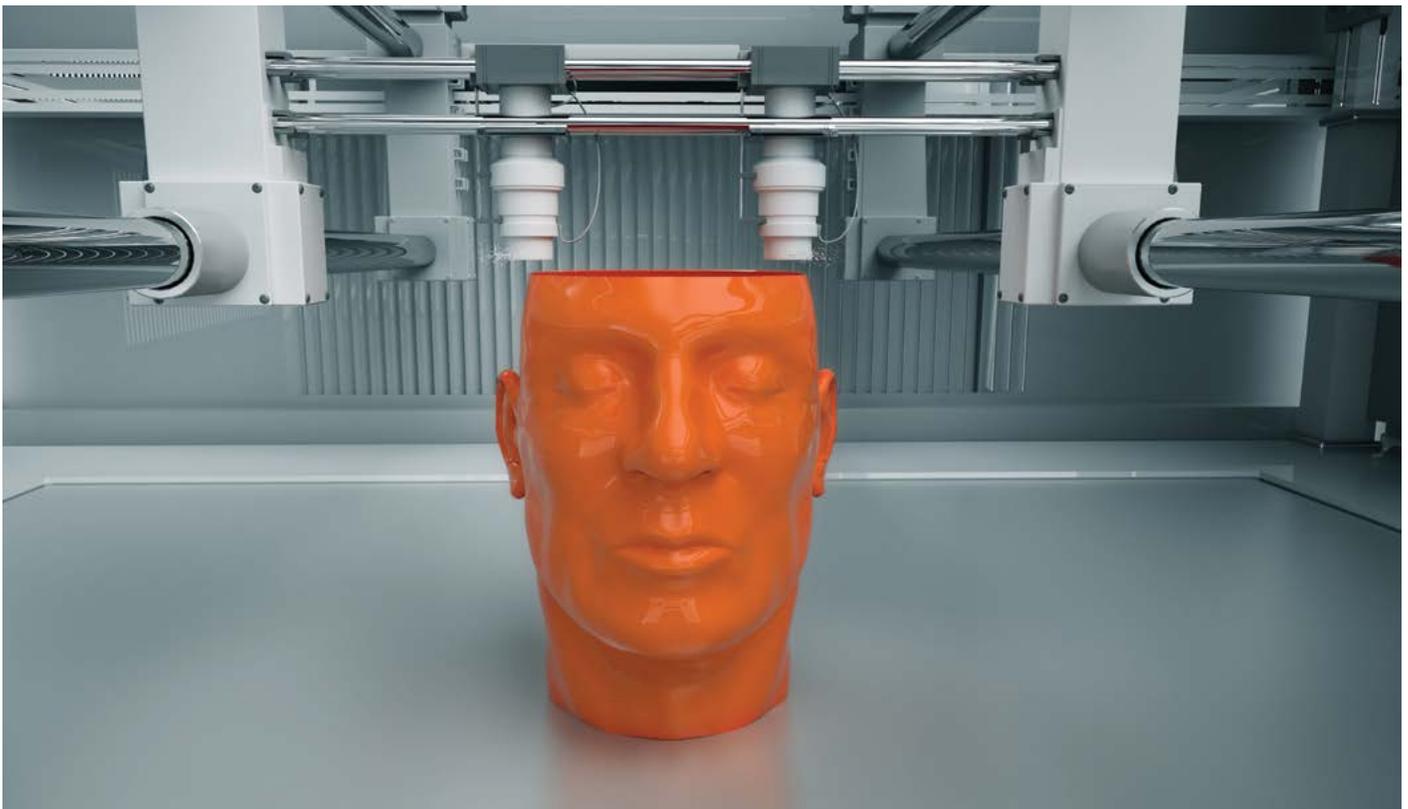

Technology identification

Additive manufacturing technology is fast evolving, providing better opportunities as well as reducing the cost and time for fabrication. A large number of technologies are grouped under the realm of additive manufacturing. An indicative list of various technologies and characteristics influencing the selection of technology are provided in Table 1 below.


Table 1: Comparison of various technologies

Material	Process	Material source	Heating method	Volume capacity	Resolution	Deposition rate
Plastic	Selective Laser Sintering (SLS)	Powder bed	Laser	V. Low	High	V. Low
	Fused Deposition Modeling (FDM)	Heated Nozzle	Heated Nozzle	Low	Medium	V. Low
Metal	Direct Metal Laser Sintering (DMLS)	Powder bed	Laser	V. Low	High	V. Low
	Selective Laser Melting (SLM)	Powder bed	Laser	Low	High	V. Low
	Electron Beam Melting (EBM)	Powder bed	Electron Beam	Low	High	Low
	Laser Metal Deposition (LMD)	Powder feed via nozzle	Laser	Medium	Medium	Medium
	Direct Metal Deposition (DMD)	Metal wire	Plasma Arc	High	Low	V. High
	Electron Beam Additive Manufacturing (EBAM)	Metal wire	Electron Beam	High	Low	V. High

The following are the major parameters in identifying the right technology for the selected part:

- Material
- Size of the part
- Complexity of the component
- Quantity / production rate
- Material deposition rate
- Mechanical properties
- Resolution, post processing, and finish

Technology selection has a large impact on the part properties and quality. Therefore, conflicting aspects need to be thoroughly reviewed before selecting the technology. For instance, direct metal deposition can be extensively used for repair as it allows building up on the most substrate material using different metals. However, this will introduce thermal stresses as the process creates local melt pools for deposition.

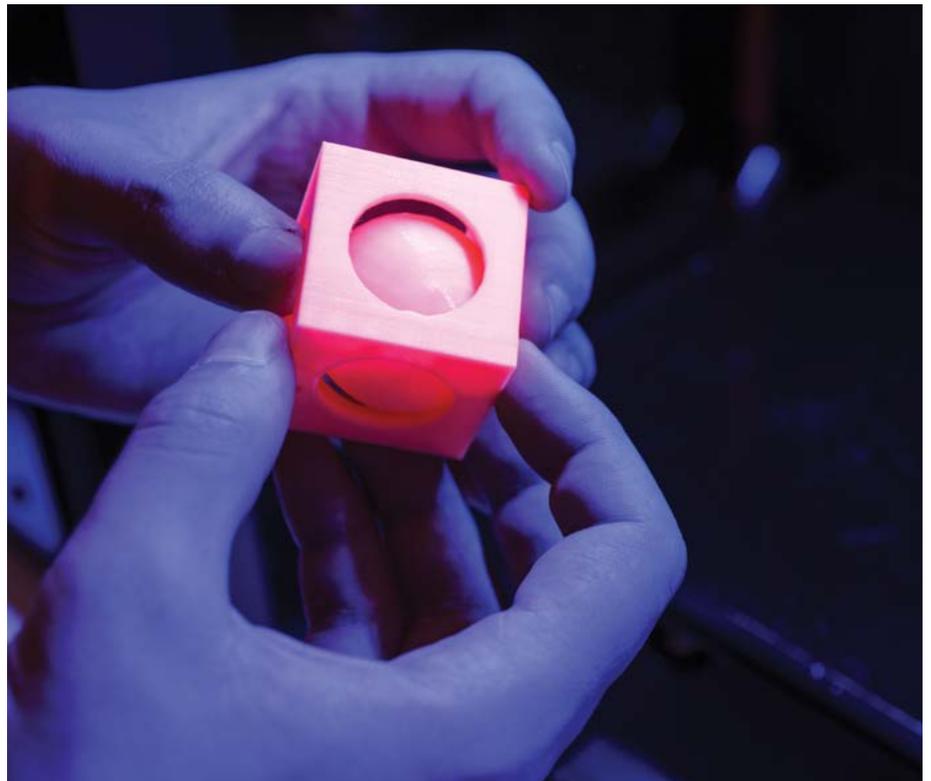


Design for additive manufacturing

Additive manufacturing offers enormous freedom to the designers as highlighted in the examples below:

- Capability to print very complex geometries including internal lattice structures and other intricate features
- Ease of fabrication using hard-to-machine materials
- Capability to combine multiple components of an assembly into a single sophisticated part
- Graded material combinations seamlessly varying within a part
- Objects such as sensors embedded as parts get printed

The parts are typically designed considering the limitations of conventional manufacturing processes. Once a part is identified for additive manufacturing, the design can be enhanced, leveraging the freedom offered by additive manufacturing.

A typical design process for additive manufacturing is shown in Figure 5.

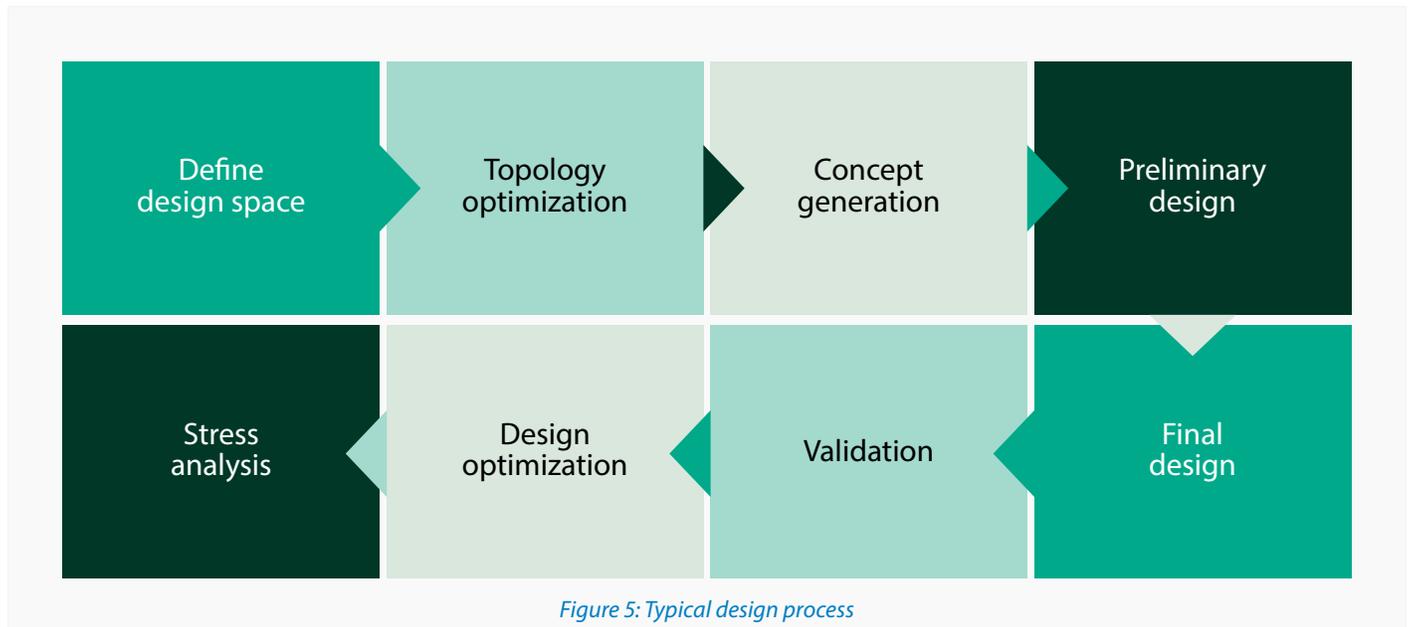

Take for example structural components where the designer can aim for the mathematically optimized topology, while exploring the complete design space. Optimization tools such as OptiStruct allow the designer to set the optimization parameters. For example, the designer can target weight-reduction while specifying constraints such as interface geometry, strength, and stiffness. The optimized material layout, considering the target

parameters and constraints is provided by the tool. This result is used by the designer to generate concept designs in line with the optimized material layout.

The designer, however, needs to follow the design rules and understand the limitations of the selected additive manufacturing technology. Typical design considerations include: optimum orientation for manufacturing, overhangs, abrupt changes in thicknesses, minimum

feature size, internal surface finish, aspect ratio, and mechanical properties, which vary with technology.

3D printing of a prototype closes the gap between design and manufacturing. Infosys has a lab fully equipped with an internally developed printer – Vismay, a Stratasys printer, required software applications, hardware tools, and measuring instruments.



In-house 3D printer – Vismay

Most 3D printers available in the market are very expensive. Hence, a group of creative and innovative engineers conceptualized, designed, and developed an affordable 3D printer, 'Vismay' (Figure 6).

Vismay, is fabricated using electrical and electronic waste and the post processing applications are customized by using open source software. Vismay produces parts with good accuracy and it can process many plastic materials such as PLA, ABS, Nylon, and Flex-PLA.



Figure 6: Vismay

Value accounting

Considering the large variation in cost structure for the manufacture of 3D printed parts based on the technology and in comparison to conventional manufacturing, a detailed value accounting needs to be performed. The following are the major cost drivers considered for value accounting:

- Batch quantity
- Defect rate
- Complexity
- Material
- Volume / weight
- Additive manufacturing technology
- Post-processing requirements


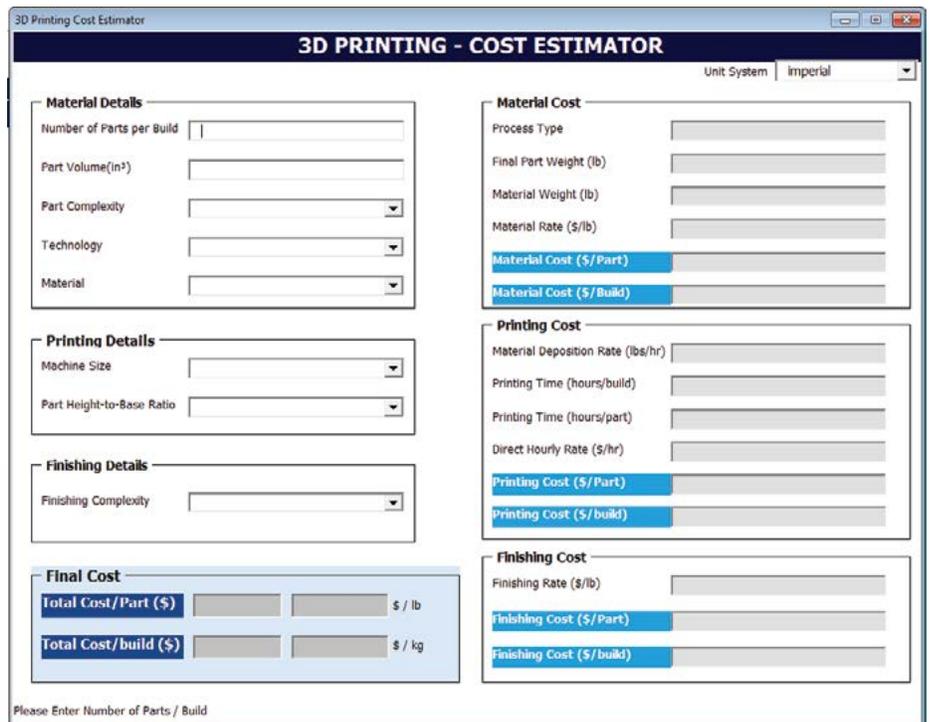


Figure 7: Cost estimation tool

Infosys has built a tool for the cost estimation of 3D printing, as shown in Figure 7. The tool guides the user in selecting compatible inputs with respect

to technology and material type. Some of the other parameters considered are the part specification, category of the printer, post processing requirements,

and production rate. Based on these parameters, the material deposition rate and printing time are calculated to arrive at the printing cost.

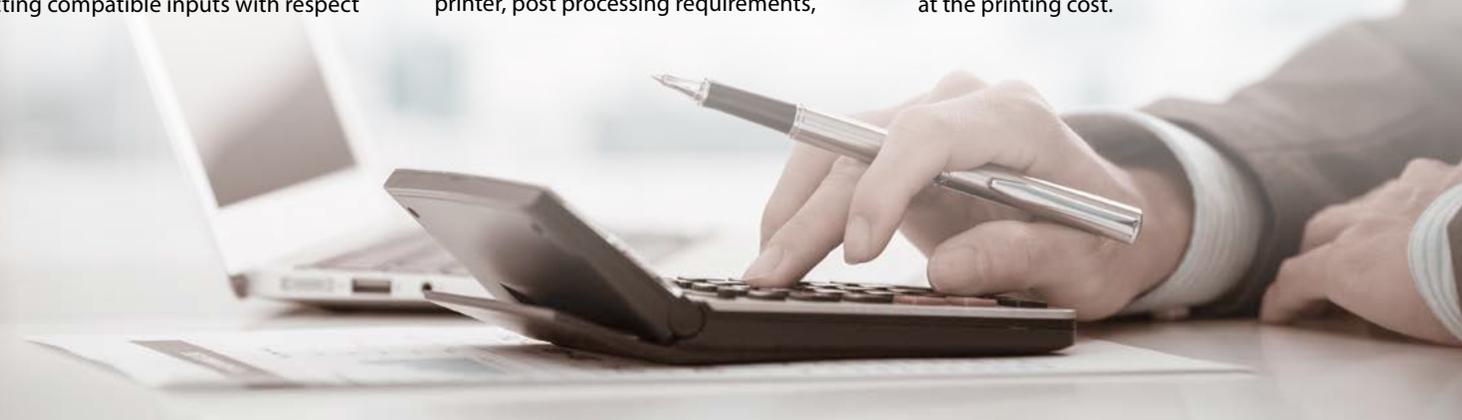

Technical demonstration

Here is a technical demonstration, which details the implementation of this framework in the aerospace industry.

Part selection

A study of parts was performed to shortlist and identify the part for proof of concept creation. Titanium parts belonging to secondary structures and systems were found to be the most suitable for additive

manufacturing. Components belonging to primary structures were avoided, considering the criticality for aerospace certification. A few criteria used in the selection of suitable parts are as below:

- Buy-to-fly ratio
- Size
- Cost of the component by conventional manufacturing

- Modifiability for additive manufacturing
- Larger quantity per ship set
- Machinability

It was found that titanium parts with high buy-to-fly ratios were most suitable for additive manufacturing. High material cost, wastage, and low machinability of titanium were leading to high part costs as seen from figure 8.

SI	Part Number	Description	Key consideration	Material	Part Weight (Kg)	Buy to Fly	Size (mm)	No of fasteners used	Modifiability	Cost (\$)
1	Shroud	Weldment from titanium sheet	High rejection rate	Ti-6Al-4V, Annealed	1.92	2.2	Dia. - 307 H 260	0	Low	5K
2	Duct support bracket	Formed titanium sheet metal assembly	Large number of fasteners and weight optimization opportunity	Ti-6Al-4V, Hot Formed	1.35	NA	275 X 226 X 220	34	Medium	2.5K
3	Fitting	Machined fitting	High buy to fly ratio with complex features	Al 2124-T851	0.72	3	304 X 177 X 127	0	Medium	1K
4	Bracket Assembly	Assembly of machined components	High buy to fly ratio and integration opportunity	Ti-6Al-4V, Annealed	1.1	15	179 X 157 X 90 186 X 69 X 40	6	High	2K
5	Door Fitting	Machined from thick block	High buy to fly ratio and weight reduction opportunity	Ti-6Al-4V, Annealed	0.51	5.8	88 X 86 X 86	0	High	1K

Figure 8: Part selection study



The door fitting part was short-listed for further study. The existing component is machined from a titanium alloy stock (Figure 9). It has a high buy-to-fly ratio of 6:1 and the quantity per ship set is about 50.

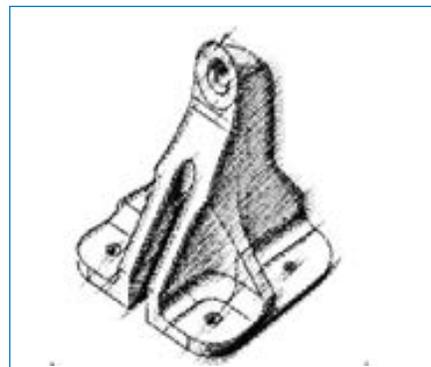


Figure 9: Initial design

The function of the component is to act as a door stop at the passenger entry doors. Hence, the part should be designed considering the stiffness, maximum deflection, and maximum interface force. The component has four fastener locations and a bearing pin is attached at its interface with the passenger door. As the number of similar fittings per aircraft is high, improvement in weight and cost per part has a large saving per ship set.

Technology identification

The part is made of titanium alloy and the same material is considered for the additive manufacturing. As optimization of topology using OptiStruct is considered, the final geometry is expected to be

complex. The geometry of the part fits in to a 100mm cube that can be printed in commonly available Direct Metal Laser Sintering (DMLS) machines. Though deposition rate would be very low, considering the complexity, DMLS can produce a near final component with very

minimal support structures and hence, minimal post processing requirements. These characteristics make DMLS the most suitable technology for additive manufacturing.

Design for additive manufacturing

Topology optimization is carried out using OptiStruct with a cube model. The fastener locations and the bearing pin location are defined as non-design

spaces. The rest of the model is defined as design space for optimization. Boundary conditions are defined and load is applied at the bearing pin location. The resultant OptiStruct model shows material removed at locations where the loads

are observed to be less. The below figure (Figure 10) shows the initial cube model, a representation of load with boundary conditions and the optimized result from OptiStruct.

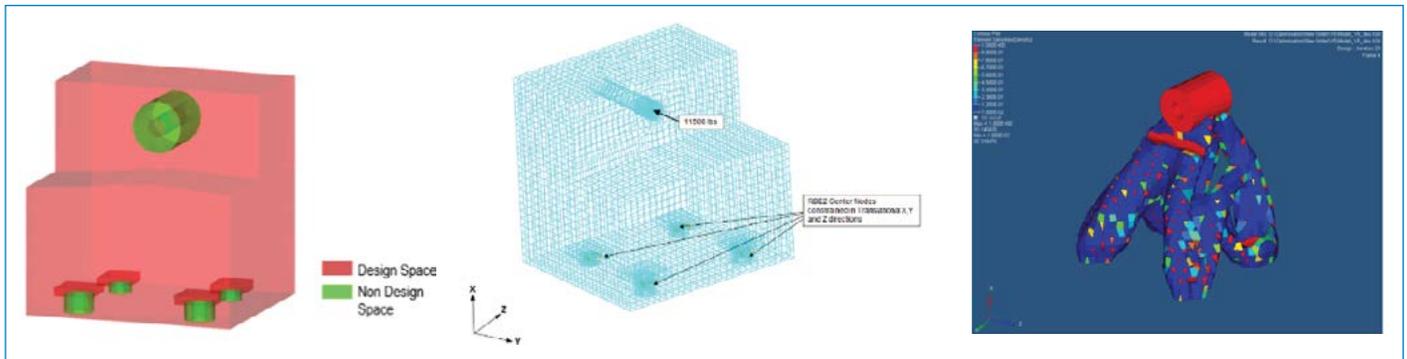


Figure 10: Topology optimization study

Design concepts

Based on the OptiStruct result, different concept designs are created for the door fitting model using CATIA as shown in Figure 11.

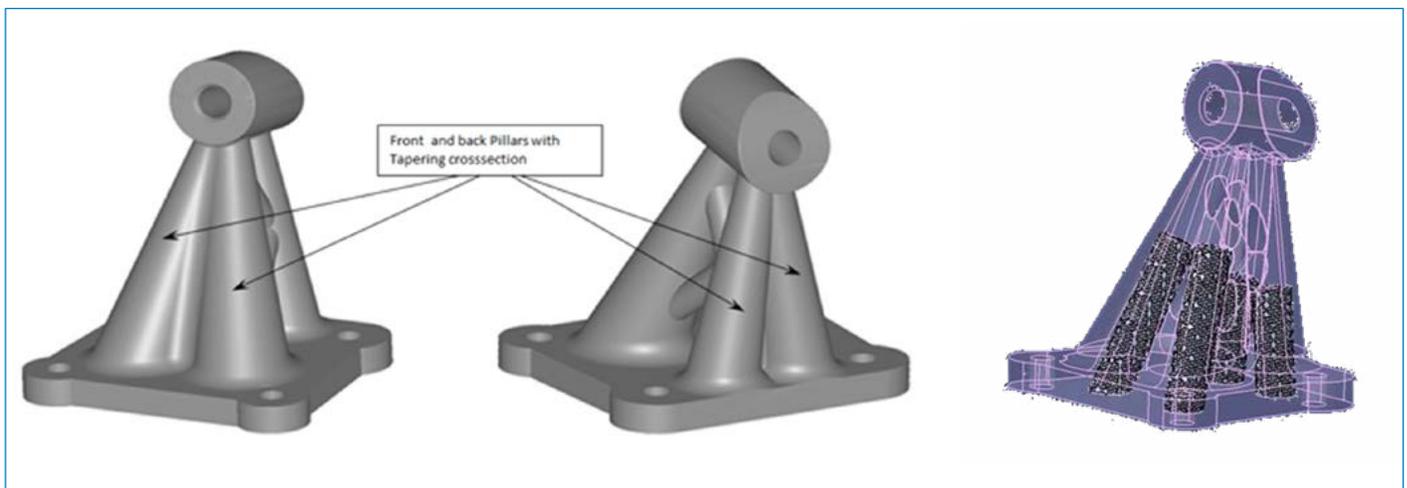


Figure 11: Design Concepts

A design similar to truss structure with tapering pillars fusing in to the head at the top and with side bridges is created to ensure structural integrity. The possibility of introducing a lattice structure is also explored for the pillars. The designs are iterated based on optimization opportunities and stress analysis result, to arrive at the optimized design.

This design is analyzed with the given loads and appropriate boundary conditions. Comparison between the current and the optimized designs are shown in Figure 12. The optimized design shows better performance on all parameters such as weight, maximum stress, stiffness, maximum deflection, and maximum interface force.

Conventional manufacturing of the proposed geometry would be difficult to achieve. Also, lattice structures provide an optimal design configuration with

Performance Comparison of Baseline and 3D Printed Design

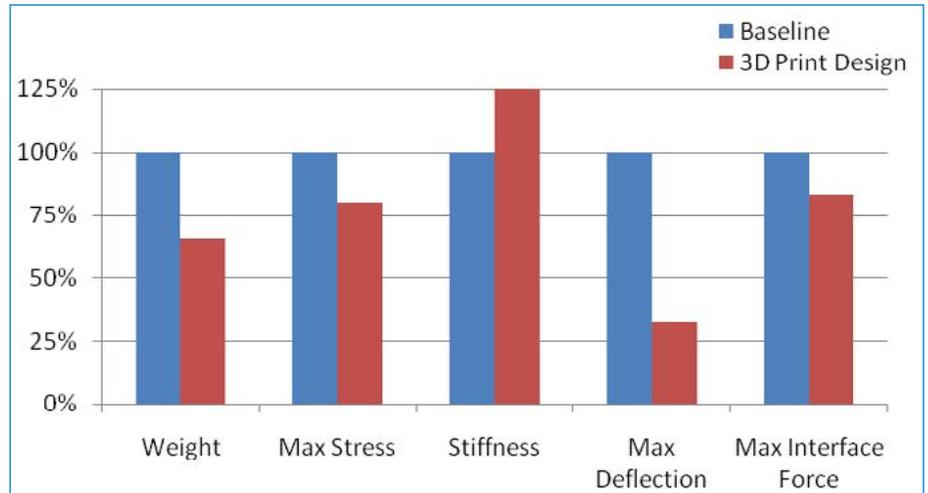


Figure 12: Comparison between current and optimized design

minimum weight. Such optimization is not achievable using conventional manufacturing methods. The design does not take into account the fatigue aspect

which requires further study. However, the current work demonstrates the first-level concept of a door fitting for additive manufacturing.

Value accounting

Value accounting is performed considering only 50 door fittings per ship set. The details are presented in Figure 13. The

current cost of the fitting is arrived at by cost estimation considering the material, manufacturing, and processing costs.

The 3D printing cost is based on printing service provider quotes for similar parts and technology.

SI	Part Description	Snapshot	Qty per ship set	Current cost (US\$)	3D printing cost (US\$)	Savings per part (US\$)	Average ship set savings (US\$)	Average annual savings (US\$)	Total program savings (US\$)SS
1	Door fitting		50	450	300	150	7,500	750,000	5,250,000

Figure 13: Value accounting

The cost of additive manufacturing is currently high due to the high cost of

printer and raw material. However, these costs are reducing at a significant rate,

which will contribute to a lower 3D printed part cost in the near future.

In conclusion

This paper presents a holistic engineering services framework for additive manufacturing. The engineering process for additive manufacturing has been detailed out and is demonstrated through a practical design problem. A door fitting

has been conceptualized for additive manufacturing. The proposed concept model for 3D-printed door fitting performs better than conventional door fitting in terms of weight, strength, and stiffness. The part can be manufactured using

the direct metal laser sintering (DMLS) process. This can reduce the weight of the component and provide a cost saving of about 35% each. It also reduces machining and eliminates scrap.



Acknowledgments

The authors would like to thank Mr. T. G. A. Simha, Principal Consultant, for the detailed review and valuable inputs towards preparing the document. Thanks to Dr. Shama Rao N., Mr. Divakaran V. N., Mr. Madhusudanan Nair, Mr. Prashanth

Sadasivaiah, Mr. Shamnad Pampoor, Mr. Vivek Mohan, Mr. Thirunavukkarasu K. S., and Mr. Pradeep Ramanand for their timely help provided in performing the study for technical demonstration and preparing the document. The authors would also

like to thank the senior management of Engineering Services practice at Infosys, especially, Mr. Sundaresh Shankaran, AVP and Practice Head, Core Engineering, for their continuous support and encouragement.



About the Authors



Mr. Sudev P. Pattathil

Group Project Manager, Aerospace Product Development group, Infosys Limited

Sudev has more than 17 years of design experience and holds post-graduate certifications in mechanical engineering as well as project management (PMP). He is a member of the ASTM committee for additive manufacturing. He has strong product development experience and has handled projects including design of aircraft structures and systems, value engineering (VAVE), aerospace stress certification, design of automotive components, and technical publications.



Mr. Sheshadri Ganeshiah Uttameshwar

Senior Project Manager, Manufacturing and Value Engineering (VAVE) group, Infosys Limited

Sheshadri brings with him over 20 years of design and manufacturing experience, working across various industries. He has a strong manufacturing experience and industrial exposure, having worked on various projects of design, tooling, process planning, and NC programming for heavy engineering, marine, aerospace, automotive, and general engineering industries. He has worked on various VAVE and cost-modeling projects, leveraging different cost-modeling tools and techniques.



Dr. Ravi Kumar G. V. V.

AVP, Senior Principal, and Head – Advanced Engineering group (AEG), Infosys Limited

Dr. Ravi brings with him nearly 20 years of research and industrial experience in the aircraft industry. His areas of interest include aircraft structures, knowledge-based engineering, composites, and structural health monitoring. He has authored more than 35 technical papers in various journals / conferences / white papers and filed a patent. He has worked on various prestigious engineering design & development, and KBE tool development projects for both the military and commercial aircraft programs including the Indian light combat aircraft (LCA). He obtained his doctoral degree in applied mechanics from IIT Delhi. He worked at Tata Research Design and Development Center (TRDDC), Pune, and Aeronautical Development Agency (ADA), Bengaluru, prior to joining Infosys.

For more information, contact askus@infosys.com

Infosys[®]
Navigate your next

© 2018 Infosys Limited, Bengaluru, India. All Rights Reserved. Infosys believes the information in this document is accurate as of its publication date; such information is subject to change without notice. Infosys acknowledges the proprietary rights of other companies to the trademarks, product names and such other intellectual property rights mentioned in this document. Except as expressly permitted, neither this documentation nor any part of it may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, printing, photocopying, recording or otherwise, without the prior permission of Infosys Limited and/ or any named intellectual property rights holders under this document.